
LED Sphere Display

A complete 360-degree spherical LED system assembled from custom-shaped modules for immersive information, art and branded environments.

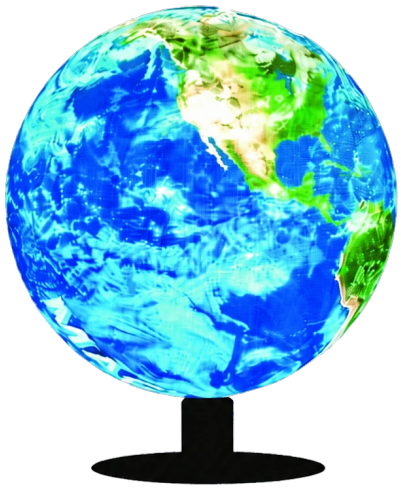

Product rendering. Artwork shown on the screen is illustrative.

Key selection points

- P1.8 and P2.5 configurations
- Standard diameters from 1.0 to 2.5 m
- 3840 Hz refresh rate
- Base, suspended or fixed installation
- Custom A/B/C shaped LED modules

Before requesting a quote

Share the installation location, approximate dimensions, quantity, indoor or outdoor environment, viewing distance, delivery country and target date. Approximate requirements are welcome.

Purchasing terms

MOQ, availability, lead time, warranty, shipping and payment terms are confirmed in the project quotation. This guide does not add a standard commitment.

Technical specifications

Parameter	Published configuration
Pixel pitch options	P1.8 and P2.5
Standard diameters	1.0 m, 1.5 m, 2.0 m and 2.5 m
P2.5 resolutions	1256 x 628; 1884 x 942; 2513 x 1256; 3141 x 1570 pixels
P1.8 resolutions	1675 x 837; 2513 x 1256; 3351 x 1675; 4188 x 2094 pixels
Brightness	P2.5: 700 cd/m2; P1.8: 600-700 cd/m2
Refresh rate	3840 Hz
Protection / maintenance	IP45 / front service
Installation	Floor base, suspension or fixed structure
Power input	AC 90-264 V / 47-63 Hz
Operating range	-20 to 60 C; 10-85% RH
Compliance options	CCC, CE, RoHS, FCC, BIS, CB, TUV and IEC

Configuration and installation note

Published values are model-dependent selection guidance. Confirm dimensions, power, protection, control, installation drawings and destination-specific compliance in the approved quotation. Listed compliance options do not mean every model holds every certificate. This guide is not a fabrication or structural installation drawing.

https://jiamitv.com/product/led-sphere-display/

Email: georgejiami@gmail.com | WhatsApp: +86 135 1066 1865

https://jiamitv.com/contact/?product=led-sphere-display